

机械颜色按实际为准、技术参数性能及特点如有更改，恕不另行通知。

Mechanical color according to the actual performance, technical parameters and features are subject to change without prior notice.



瑞安市嘉利特印刷包装机械有限公司
RUIAN GREAT PRINTING AND PACKAGING MACHINERY CO.,LTD.

地址: 浙江省瑞安市经济开发区上东路88号

Add: No.88, Shangdong Road, Economic Development Zone,
Ruian City, Zhejiang, China.

电话(Tel): 0086-577-65171599

传真(Fax): 0086-577-65191028

E-mail: sales1@jltnachine.com

中文官网: www.rajlt.com

International web: www.jltnachine.com



www.rajlt.com



Create Higher Value For Customers

为客户创造更高的价值

01



工艺优化
Process Optimization

02



技术支持
Technical Support

04



零配件服务
Spare Parts Service

03



生产流程改进
Process Improvement

Committed To Innovation, Intelligent Technology Change Life

致力于创新，智能科技改变生活

Keep listening to users' voices, Provide and share professional solutions

倾听用户的声音，
提供完美的印后工艺解决方法。

嘉利特，我们值得被选择

JIALITE Machinery, We Deserve To Be Chosen

我们通过多种产品，拓展市场



高产量首选
高速全自动覆膜机系列
High-yield preferred
High speed automatic
laminating machine series



FM-H自动热刀立式覆膜机（智能）
Automatic Hot Knife
Laminating Machine



FM-E自动立式覆膜机
Automatic Vertical Type
Laminating Machine



FM-B自动立式覆膜机
Automatic Vertical
Laminating Machine



FY-B自动预涂膜覆膜机
Automatic Thermal Film
Laminating Machine



经济之选
半自动覆膜机系列
The economic choice
Semi-automatic Laminating
Machine Series



FY-A800自动预涂膜覆膜机
Automatic thermal
laminator



FM-1080M 半自动立式两用覆膜机
Semi Automatic Vertical
Laminating Machine



FY-M 半自动预涂膜覆膜机
Semi Automatic Thermal
Laminating Machine



SA-1200 手动UV上光机
Manual UV Oil
Coating Machine



提升品质
上光机系列
Improve the quality
Polishing Machine Series



SA-1200 自动UV上光机
Full sheet automatic UV oil
Coating machine 250-600g



SE-1200 自动厚薄纸UV上光机
Full sheet automatic UV oil
Coating machine 80-600g



SE-1200 自动双机座UV上光机
Automatic double coater UV Oil
varnishing machine

嘉利特设备 应用领域

JIALITE Machine Application Area



嘉利特纸面整饰工艺方案， 让印刷包装领域拥有更多的可能性

JIALITE Paper Product Processing Solutions,
There Are More Possibilities For Printing And Packaging Area.



FM Series

立式覆膜系列

Vertical Film Series

用途

FM 系列全自动覆膜机，即涂、预涂两用机型，作为专业的纸张覆膜设备，适用于广告海报，绘本书刊杂志，资料册，彩盒包装，日历台历，商务卡片等领域，提高产品档次，达到防尘防水防油的效果。是印刷包装企业，印后加工中心的理想选择。

Usage

FM vertical series fully automatic laminating machine (water base glue coating dry laminating and thermal laminating dual functions machine), as a professional equipment used for plastic film laminating on the surface of paper printed matter. Widely applicable for laminating in advertising poster, Picture books and magazine, display book, color paper box, calendars, and commercial cards fields, Improving the printing matter grades, and achieve the purpose of dustproof, waterproof, oil proof. It's the best choice for printing and laminating enterprises of all scales.

系列机型

FM 系列主要有三种机型: FM-B, FM-E, FM-H;

Series Model

FM vertical series include three type of model: FM-B, FM-E, FM-H;

设备工作流程 Work Process



A Variety Of Models To Meet Your Various Production Needs

多种机型 满足您的各种生产需求

Main Configuration

1. Equipment appearance professional industrial design, spray-paint process, Practical and beautiful.
2. Non stop Feeder, vertical dual functions laminator, automatic slitting (round knife suitable for OPP, BOPP), automatic collector.
3. The cutting device can be selected with chain knife and hot knife system, meet the needs of all kinds of film cutting.
4. The cutting device with a tension controller, bouncing function, ensure paper flat and unwinding.
5. High quality pneumatic conveying paper feeder with 4 suckers for lifting paper and 4 suckers for conveying paper to ensure stable and fast paper feeding.
6. Overlap device is controlled by side pull gauge and servo motor, ensure accuracy.
7. Paper conveying plate with customize corrugated stainless steel plate.
8. The hot press roller adopts electromagnetic heating system, uniform temperature, high efficiency and energy saving, it will ensure high quality products' film laminating requirements.
9. The electrical configuration mainly adopts the Taiwan Delta electrical control system and the French Schneider electric appliance.
10. Auxiliary cart lifting changing roll film, Single person independent operation.

Option Configuration

Chain knife, Hot knife, Ink jet print unit, Embossing unit, Dust remover, Window patching laminating, Double side laminating, Double heating press laminating, UV dryer, Multi rolls film laminating, Corona device, remove static device.

机器配置

- 1、设备外观专业设计，烤漆工艺，经久耐用，美观大气。
- 2、不停机送纸机，立式两用覆膜主机，自动割纸机（圆盘刀割纸适用于普通BOPP, OPP膜），不停机自动收纸机。
- 3、割纸机可选配链刀、热刀系统，满足各种割膜断纸需求。
- 4、割纸机配有张力控制器，带弹跳功能，确保纸张平整不卷曲。
- 5、送纸机采用飞达气动输纸，四吸四送吸盘，平稳输送不同规格纸张与快速送纸。
- 6、搭边装置采用侧拉规和伺服控制系统，精准稳定。
- 7、输送台板采用定制不锈钢波纹板。
- 8、热压辊采用电磁加热系统，温度均匀，加热高效节能，保证高品质覆膜要求。
- 9、电器配置主要采用台湾台达电气控制系统、法国施耐德电器原件、日本欧姆龙按钮及感应器。
- 10、辅助推车升降换膜，实现单人独立操作。

可选配置

链刀分切，热刀分切，喷码装置，压纹装置，除粉，开窗覆膜，双面覆膜，双道热压覆膜，UV光固，多卷多段膜覆膜，电晕处理装置，静电消除。

FM-H Automatic Hot Knife Laminating Machine

自动热刀立式覆膜机（智能）



智能科技实现完美操控体验。
全能一体机，伺服飞达，自动
调节纸张尺寸！
Dual function Machine, Servo Feida,
Automatic adjustment of paper size.
Intelligent technology for a perfect
control experience!

SPEED

10-110
m/min

FM-E Automatic Vertical Type Laminating Machine (Chain Knife)

自动立式覆膜机（链刀）



精益生产，人性化设计
尽享简便易用性
Lean production, humanized
design enjoy ease of use

SPEED
10-80
m/min



FM-B Automatic Vertical Laminating Machine

自动立式覆膜机



为您的生产奠定完美的开局
无与伦比的灵活性和覆膜品质
Make the perfect start for your
production Unparalleled
flexibility and film quality

SPEED
10-70
m/min



FM-EH1080 Automatic Hot Knife Laminating Machine (Powder Remover)

自动热刀覆膜机（除粉）



全能一体机，高效、极致，
智能科技实现完美操控体验！
All-in-one machine, efficient
and extreme, intelligent
technology for a perfect control
experience!

SPEED

10-80
m/min

FM-1080 FM Automatic Vertical Window Laminating Machine

自动立式开窗覆膜机



个性化设计
满足您的各种生产需求
Personalized design
Meet your various production
needs

FM-1080 FM Automatic Vertical Laminating Machine (Double hot roller pressing)

自动立式双热压辊覆膜机



为您定制
您需要的设备
Customized for you
The equipment
you need

嘉利特提供定制功能选配服务

JIALITE Provides Customized Function Service



热刀
Hot knife




链刀
Chain knife




贴窗覆膜
Window laminating



双压辊
Double pressure roller



圆刀
Round knife



喷码
Jet printing



除粉机
Powder remover



除粉机
Powder remover

FM-800/1080/1280

立式覆膜系列技术参数
Series Vertical Automatic Laminating Machine

常规参数 General parameters

型号	Model
最大纸张规格	FM-800-Max. paper size-mm
最小纸张规格	FM-800-Min. paper size-mm
最大纸张规格	FM-1080-Max. paper size-mm
最小纸张规格	FM-1080-Min. paper size-mm
最大纸张规格	FM-1280-Max. paper size-mm
最小纸张规格	FM-1280-Min. paper size-mm
速度	Speed-m/min
纸张厚度	Paper thickness-g/m ²
搭口精度	Overlap precision-mm
无胶膜厚度	Film thickness (common micrometer)
涂胶厚度	Common glue thickness-g/m ²
预涂膜规格	Pre-gluing film thickness-g/m ²
不停机送纸高度	Non-stop Feeding height-mm
不停机收纸高度(含托盘)	Collector paper height(incl. pallet)-mm
主电机功率	Main motor power-kw
整机功率	Whole machine power-kw
工作功率	Working power-kw
电压	Voltage-V
工作压力	Roll working pressure-Mpa
压缩空气	Air pressure requirement-Bar
用气量	Air consumption-m ³ /h
电线粗细	Cable thickness-mm ²

FM-H	FM-E	FM-B
780X880	780X880	780X880
350×270	350×270	350×270
1080×1100	1080×1100	1080×1100
360×290	360×290	360×290
1280×1250	1280×1250	1280×1250
360×290	360×290	360×290
10-110	10-80	10-70
80-500	80-500	80-500
≤±2	≤±2	≤±2
10/12/15	10/12/15	10/12/15
4-10	4-10	4-10
1005,1006,1206 (1508 and 1208 for deep embossing paper)		
1150	1150	1150
1050	1050	1050
5	5	5
95	65	60
35-45		
380V-50Hz-3P		
15	15	15
1.0	1.0	1.0
80	80	80
25	25	25

★ 热刀割纸最小尺寸(Hot knife paper min size) : 360x320mm ★ 链刀割纸最小尺寸(Chain knife paper min size) : 360x290mm

整机安装尺寸 Installation size

No	Model	FM-H	FM-E	FM-B
FM-800				
A 总长	Overall length-mm	7400	7400	7400
B 总宽	Overall width-mm	1900	1900	1900
C 总高	Overall height-mm	2700	2600	2400
毛重	Gross weight	7800	7600	7200
净重	Net weight	7500	7300	6900
Non-stop feeding paper pile rail space with 2m 不停机送纸堆轨道预留2米				

FM-1080				
A 总长	Overall length-mm	8400	8400	8400
B 总宽	Overall width-mm	2200	2200	2200
C 总高	Overall height-mm	3000	2800	2600
毛重	Gross weight	9800	9000	8000
净重	Net weight	9200	8600	7600
Non-stop feeding paper pile rail space with 2m 不停机送纸堆轨道预留2米				

FM-1280				
A 总长	Overall length-mm	8800	8800	8800
B 总宽	Overall width-mm	2400	2400	2400
C 总高	Overall height-mm	2700	2600	2400
毛重	Gross weight	10000	9800	9300
净重	Net weight	9500	9300	8800
Non-stop feeding paper pile rail space with 2m 不停机送纸堆轨道预留2米				

选配单元安装尺寸 Option unit installation size

名称	FM-1080	长宽高 LxWxH(mm)	N.W/G.W/KG
双道除粉单元	Brush & heating dust remover	2500x1800x1500	900/1000
单热压除粉单元	Heating dust remover	2000x1800x1500	700/800
开窗覆膜单元	Window laminator	3660x1920x1700	800/900
圆盘刀割纸单元	Round knife unit	1150x1800x1700	800/900
链刀割纸单元	Chain knife unit	1950x1800x1750	1000/1100
热刀割纸单元	Hot knife unit	1650x1800x1600	1000/1100
二次热压单元	Double hot pressing-roll	600x1800x1650	800/850
UV光固单元	UV dryer unit	500x1800x1650	400/450

嘉利特，从客户的视角出发，
为客户提供新的商业机遇。

JIALITE Machinery Could Provides New Business
Opportunities From The Perspective Of Customers.

配置项目 CONFIGURATIONS

FEEDING UNIT 送纸部

		FM-H	FM-E	FM-B
喷气式送纸方式	Jet-feeding Mode	●	●	●
高速飞达头	High Speed Feeder	●	●	◎
飞达伺服驱动	Feeder servo driver	●	◎	◎
贝克真空泵	Becker Vacuum Pump	●	◎	◎
预堆装置，不停机送纸	Pre Stack Device Non Stop Feeding Paper	●	●	●
侧拉规	Side Gauge	●	●	●
纸张搭边伺服控制	Servo Control Overlap	●	◎	◎
放纸台有上下限设置	Laying Paper Plate With Max & Min Limited	●	●	●
除粉装置	Dust Remover Unit	◎	◎	◎
开窗覆膜装置	Window Laminating Unit (Coating & Drying)	◎	◎	◎

压合主机 LAMINATING UNIT

		FM-H	FM-E	FM-B
辅助加热烘箱	Auxiliary heating oven	●	●	●
干燥辊直径	Dry roller diameter	1000mm	800mm	600mm
干燥辊电磁加热	Dry roller Electromagnetic heating system	●	◎	◎
智能恒温系统	Intelligent constant temperature system	●	●	●
烘箱气动开启	Auxiliary oven pneumatic opening	●	◎	◎
加热辊镀铬处理	Heating roll with Chromium treatment	●	●	●
电磁加热系统	Electromagnetic heating system	●	●	●
橡胶压力辊	Rubber pressure roll	●	●	●
压力自动调节	Pressure automatic adjustment	●	●	●
主机链条台湾KMC	Driver Chain KMC-Taiwan	●	●	●
缺张检测	Paper miss detection	●	●	●
上胶系统特氟龙处理	Gluing system Teflon treatment	●	●	●
自动润滑	Automatic lubrication & cooling	●	●	●
可移动触摸屏控制面板	Removable touch screen control board	●	●	◎
辅助叉车	Auxiliary cart lifting	●	●	●
多段覆膜滑差轴	Multi roll film working-Slip axis	◎	◎	◎
双道热压辊筒	Double hot roller press	◎	◎	◎
涂胶/计量辊独立电机控制	Gluing rollers Independent control	●	◎	◎


注：“●” common standard 标配 “◎” option standard 选配



电脑控制界面
Computer control interface



高速飞达送纸（选配伺服）
High Speed Feeder （Option servo）



拉规
Pull gauge



气动部分
Pneumatic parts

割纸部 Automatic Cutting unit

		FM-H	FM-E	FM-B
圆刀装置	Round knife unit	●	●	●
链刀装置	Chain knife unit	◎	◎	◎
热刀装置	Hot knife unit	◎	◎	◎
砂带断膜装置	Sand belt break film device	●	●	●
弹跳装置防纸张卷曲	Bounce roller anti paper curling	●	●	●
螺杆式空气压缩机	Screw type air compressor	◎	◎	◎

自动不停机收纸部 Delivery unit

		FM-H	FM-E	FM-B
不间断收纸	Non stop delivery	●	●	●
气动拍打齐纸装置	Pneumatic patting and collecting structure	●	●	●
纸张计数器	Sheet counter	●	●	●
光电感应落纸台下降	Photoelectric induction paper board fall	●	●	●
自动减速收纸功能	Automatic deceleration paper collect	●	◎	◎

电气控制部 Electronic parts

高品质电气原件	High quality electric components	OMRON/SCHNEIDER
控制系统	Controller system	Delta-Taiwan & Rexroth
伺服电机	Servo motor	Weikeda-German technology
主操作屏	Main Monitor touch screen-14 inch	Samkoon-Japanese technology
链刀热刀操作屏	Chain knife & hot knife touch screen-7 inch	Samkoon-Japanese technology
变频器	Inverter	Delta-Taiwan & Rexroth
传感器/编码器	Sensor/Encoder	Omron-Japan
按钮开关	Switch	Schneider-French

气动原件 Pneumatic components

气动配件	Parts	Airtac-Taiwan
------	-------	---------------

轴承 Bearing

主要轴承	Main bearing	NSK-Japan
------	--------------	-----------

注：“●” common standard 标配 “◎” option standard 选配

合作伙伴 PARTNER

Rexroth

Schneider
Electric

KEYENCE

OMRON
欧姆龙

Samkoon®

DELTA

NSK

亞德客
AIRTAC

BECKER

FY-B Automatic Thermal Film Laminating Machine

自动预涂膜覆膜机

First-class Cost Control,
Ensure Your Earnings Ideal Equipment
To Reduce Process Costs

工业印刷商用覆膜经济之选



+ MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	FY-800B	FY-1080B	FY-1280B
Max. paper size-mm	最大纸张规格mm	780X880	1080X1100	1280X1250
Min. paper size-mm	最小纸张规格mm	350x270	350x290	350x290
Speed-m/min	速度m/min	10-110	10-110	10-110
Paper thickness-g/m²	纸张厚度gms	80-500	80-500	80-500
Overlap precision-mm	纸张搭口	≤±2	≤±2	≤±2
Film thickness (common micrometer)	预涂膜规格	1005,1006,1206 (1508 and 1208 for deep embossing paper)		
Non-stop Feeding height-mm	不停机送纸高度mm	1150	1150	1150
Collector paper height (incl. pallet)-mm	不停机收纸高度mm (含托盘)	1050	1050	1050
Main motor power-kw	主电机功率kw	5.5	5.5	5.5
Whole machine power-kw	整机功率kw	35	35	35
Working power-kw	工作功率kw	25-28	25-28	25-28
Voltage-V	电压	380V-50Hz-3P	380V-50Hz-3P	380V-50Hz-3P
Roll working pressure-Mpa	工作压力Mpa	15	15	15
Air pressure requirement-m³/min	压缩空气m³/min	1.0	1.0	1.0
Cable thickness-mm²	电线粗细m²	16	16	16

Remark: We could accept customize large size. 备注: 接受各大规格设备定制。
★ 热刀割纸最小尺寸(Hot knife paper min size): 360x320mm ★ 链刀割纸最小尺寸(Chain knife paper min size): 360x290mm

+ INSTALLATION SIZE 整机安装尺寸

Model	No	FY-800B	FY-1080B	FY-1280B
Overall length-mm	A 总长	7000	8100	8500
Overall width-mm	B 总宽	1900	2200	2400
Overall height-mm	C 总高	2100	2100	2100
Gross weight	毛重	6500	7500	8500
Net weight	净重	6000	7000	8000

用途:

FY 系列全自动覆膜机, 预涂型覆膜机, 作为专业的纸张覆膜设备, 适用于广告海报, 绘本书刊杂志, 资料册, 彩盒包装, 日历台历, 商务卡片等工业印刷印后及商业印刷印后加工领域, 提高产品档次, 达到防尘防水防油的效果。

Usage

FY series pre-coat glue automatic thermal laminating machine as a professional equipment used for plastic film laminating on the surface of paper printed matter. Widely applicable for laminating in advertising poster, Picture books and magazine, display book, color paper box, calendars, and commercial cards fields, Improving the printing matter grades, and achieve the purpose of dustproof, waterproof, oil proof.

FY-A800

Automatic Thermal Laminator

自动预涂膜覆膜机



商用领域高速覆膜加工
Commercial high speed
laminating



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	FY-A800	FY-800-1050
Max. laminating width	最大工作宽度	780 mm	780 mm
Max. sheet	最大纸张尺寸	780 x800mm	780 x1050mm
Min. sheet	最小纸张尺寸	260 x210mm	260 x210mm
Paper feeding pile	进纸堆高度	1000mm	1000mm
Heating roller Dia	加热辊直径	380mm	380mm
Paper thickness	纸张厚度	105 ~ 500 gsm	105 ~ 500 gsm
Laminating speed	覆膜速度	5~80 m/min (max:100m/min)	5~80 m/min (max:100m/min)
Bopp film thickness	胶膜厚度	12 ~ 25µm	12 ~ 25µm
Max. film roll diameter	最大胶膜卷直径	Φ400mm	Φ400mm
Power required	总功率	25 kw (380 V AC3Φ50 / 60 HZ)	25 kw (380 V AC3Φ50 / 60 HZ)
Working power	运行功率	18kw / h	18kw / h
Installed power	安装电压	40 KVA	40 KVA
Dimension(L x W x H)	机器体积	6500 x1550 x2080 mm	7000 x1550 x 2080 mm
Weight machine	机器重量	4500kg	4800kg
Loading size	装柜尺寸	20" foot container	LCL or 40" foot container

SA-1200

Automatic UV
Oil Coating Machine

自动上光过油机



250-600
gms

SE-1200 Automatic UV Oil Coating Machine

全自动厚薄纸上光过油机



80-600 gms



用途:

SE/SA 系列上光机，主要用来对纸张表面进行上油涂层修饰纸张表面作用，可以做水性油，UV油和吸塑油上光，涂布平整细腻，节省光油又能达到产品高品质要求。SE型号采用记忆式PLC控制的风刀系统。机器外形美观、性能稳定可靠、操作简单方便、自动化程度高等特点。

USAGE

SE/SA series UV oil coating machine which is suitable for the varnishing and polishing process of various paper (80-600g/m²), machine for water-based oil, UV oil and blister varnish oil coating, after processing the print surface has the damp-proof and water-proof effects. Machine adopts the reversing mechanism to make the oil layer smooth and fine, save varnish oil and meets the high quality requirements. SE model adopts air knife system which controlled by memory type PLC. It has the characteristics of beautiful appearance, stable and reliable performance, simple and convenient operation and high automation degree.

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SE-1200 Automatic (Air knife)	SA-1200 Automatic	SE-1200M manual(Air knife)	SA-1200M manual
Max paper size-mm	纸张最大尺寸	1150×1100	1150×1100	*	*
Min paper size-mm	纸张最小尺寸	390×320	390×320	*	*
Length of Roller	辊筒长度	1250mm	1250mm	1250mm	1250mm
Paper Thickness-g/m ²	纸张厚度	80-600	250-600	80-600	250-600
Working speed	工作速度	10-80m/min	10-80m/min	*	*
Feeding paper pile height	送纸堆高度	1150mm	1150mm	*	*
Collecting paper pile height	收纸堆高度	1050mm	1050mm	*	*
Voltage	电压	380V 50HZ 3P	380V 50HZ 3P	380V 50HZ 3P	380V 50HZ 3P
Motor power-kw	主电机功率	3.5	2.5	3.5	2.5
Total standby power-kw	待机功率	70kw	70kw	65kw	65kw
Infrared Heating Power	红外灯管	1.2kw×18pcs	1.2kw×18pcs	1.2kw×18pcs	1.2kw×18pcs
Ultraviolet Heating Power	紫外灯管	3×8kw	3×8kw	3×8kw	3×8kw
Machine Weight-kg	机器重量	6900kg	6400kg	3200kg	2800kg
Overall Dimension-mm	机器尺寸	12800×2000×1800	11800×1800×1750	9800×2000×1600	8700×1800×1450
Oil type	油品类型	Water base oil, UV oil, blister varnish oil, plastic oil 水性油, UV油, 吸塑油			
Powder remover unit	除粉机组可选	Dimension: 1500x1600x1500mm; Weight:500kg;			

SGZ-II-1200 Automatic UV Oil coating machine

自动双机座上光过油机



满足未来时代需求
高速上光与稳定运转双管齐下
Meet the needs of the future era
High-speed glazing and stable operation


SUITABLE PAPER THICKNESS
80-500
gms

MAIN TECHNICAL PARAMETERS 主要技术参数

型 号	Model	SGZ-II-1200 Automatic (Air knife)	红外灯管	Infrared Heating Power	1.2kw×18pcs
纸张最大尺寸	Max paper size-mm	1150×1100	紫外灯管	Ultraviolet Heating Power	3×8kw or 2×8kw
纸张最小尺寸	Min paper size-mm	390×320	机器重量	Machine Weight-kg	8000
辊筒长度	Length of Roller	1250mm	机器尺寸	Overall Dimension-mm	19000×2000×1700
纸张厚度	Paper Thickness-g/m ²	80-600	油品类型	Oil type	Water base oil, UV oil, blister varnish oil, plastic oil
电 压	Voltage	380V 50Hz 3P			水性油, UV油, 吸塑油
待机功率	Total standby power-kw	80kw	除粉机组可选	Powder remover unit	Dimension: 1500x1600x1500mm; Weight:500kg;

Remark: We could accept customize large size. 备注: 接受各大规格设备定制。

公司发展历程 Development process

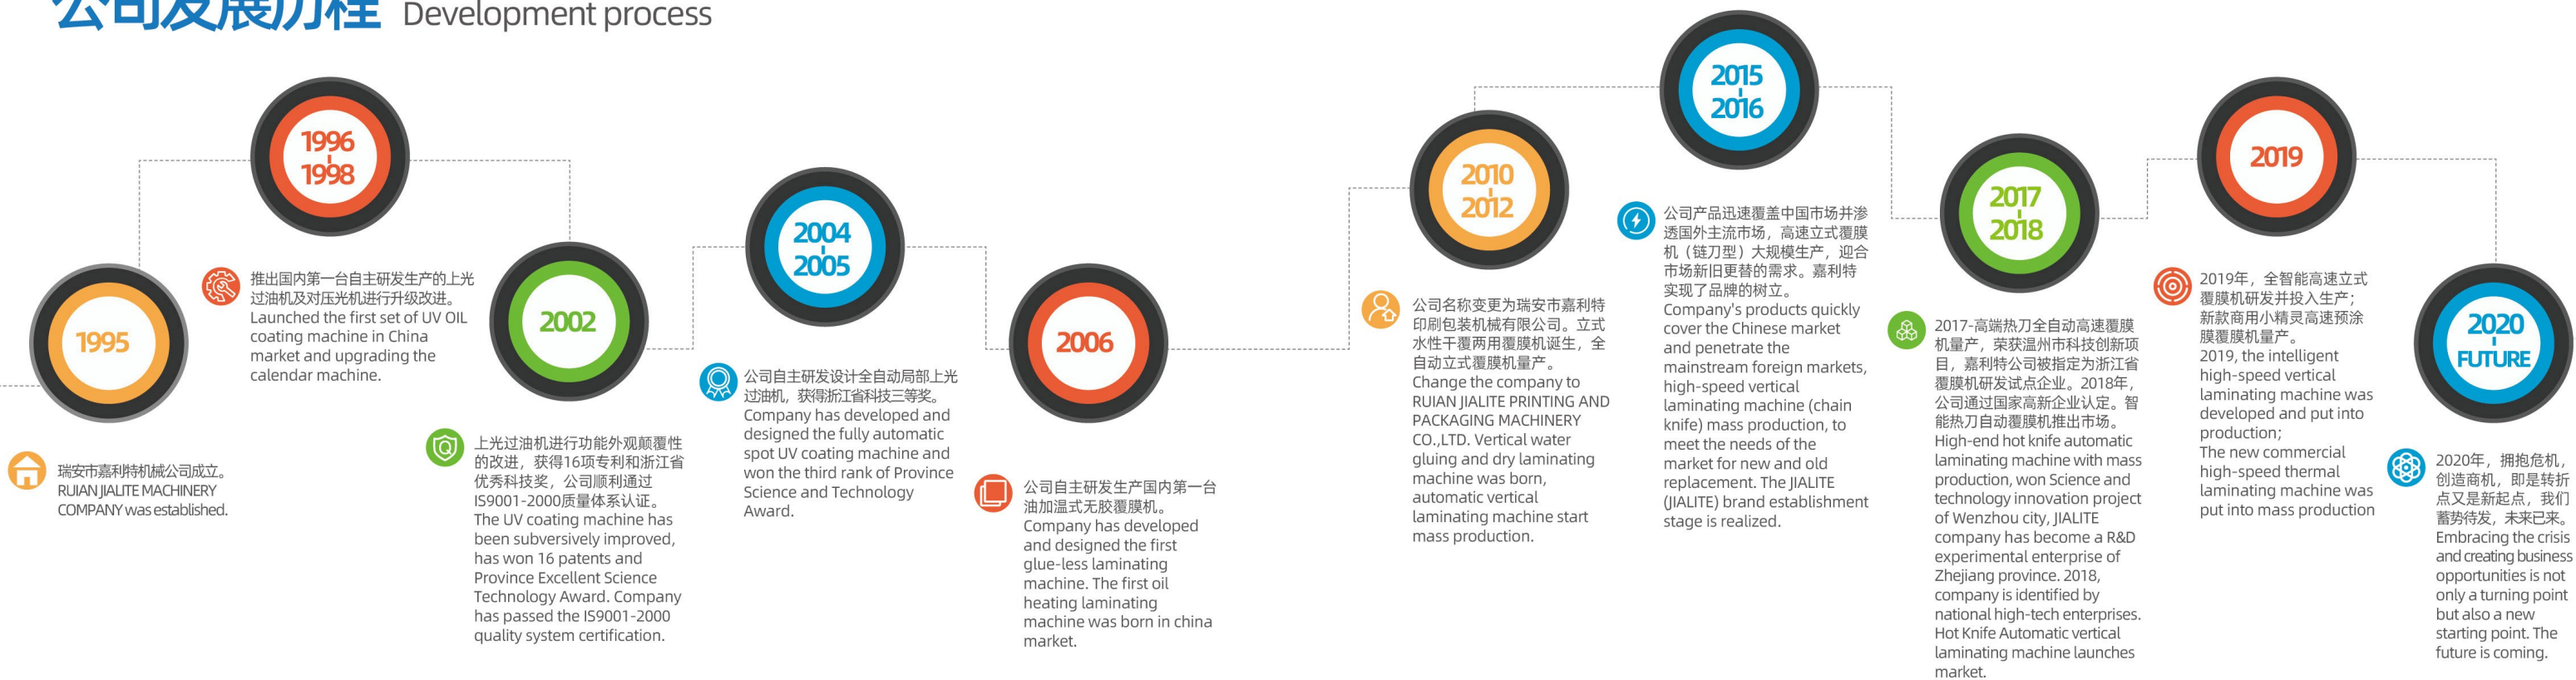

The Good Impression Is Form JIALITE Machinery

美好的“印”象来自嘉利特机械



公司简介

嘉利特机械创立于1995年，不断引进欧洲制造设备理念，结合自身20多年的生产经验，我们始终如一致力于覆膜机、上光机系列产品的研发和创新，并为每一位用户提供优质高效的产品及优化合理的印后解决方案。

公司管理机制科学，运用ERP管理系统及5S标准，确保研发、采购、加工、生产装配、出厂检验及包装物流均有严格的制度保障。公司售后制度完善，国内一二线城市均设有设备直销及服务网点。公司技术团队随时为国外客户提供售后咨询、及时上门安装调试和故障排除服务。

Company Introduction

JIALITE since from 1995. Continuous introduction the European concept of equipment manufacturing, based on more than 20 years experience, we focus on the development and innovation of laminating machine and UV coating machine, JIALITE provide efficiency products and reasonable post press solution to every user. Company structure is scientific and reasonable with humanized management mechanism.

The ERP management system and 5S standard are used to ensure the strict system of development, procurement, processing, production and assembly, factory inspection, packaging and logistics. Mature customer service system, the domestic First-tier and second-tier cities have direct selling and service branch, technical engineers team at any time provide after-sale consultation and arrangement installation and trouble shooting service for foreign customers.

Appreciate for your reasing, welcome to get your rich suggestion,
hope developping together!

感谢您的耐心阅读，欢迎来电或来邮提供您对嘉利特公司宝贵的建议，
希望共同成长。

JIALITE Machinery, Supply Good Quality Machine And Perfect Solution To You!

嘉利特机械为您提供优质的设备及完美的方案！

According To The Process Requirements Of The Printed Matter, Flexible Selection Of Suitable Type Machine And Matching The Corresponding Consumable Material

覆膜加工的方式 Laminating Type

即涂覆膜，预涂覆膜，水性覆膜
Laminating type: gluing and drying type laminaitng, precoating
type laminating and water-based laminating.

基材 Material

BOPP, PET膜，可降解PLA膜（少用）
BOPP, PET, PLA

特种功能膜 Special Functional Film

无底涂预涂膜，丝绒膜，防刮膜，触感膜，特质防护膜，磨砂膜
White Bopp thermal film, Silky Film, Anti scratch film, soft touch film,
Pro-Shield film, Sandy film

根据印刷品的工艺效果要求，选择合适的机型
以及匹配相应的耗材。

膜材的类型 Film Type

水基涂胶膜（基材），预涂膜
Wet film (Waterbase gluing), Pre-coat film (Thermal film)

膜的种类 Film Type

光膜、亚膜、镀铝膜
Glossy film, Matte Film, Metal Film

油墨种类 Oil Type

UV光油、UV哑油、水性光油、水性哑油、触感油、吸塑油
UV Oil, water base oil, Soft touch oil, Blister oil